



# OVERHEAD DOOR ORDER FORM

**PART 1**

**PLEASE PRINT CLEARLY, AND COMPLETE BOTH PART 1 AND PART 2:**

YOUR NAME: \_\_\_\_\_

YOUR COMPANY: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

CITY: \_\_\_\_\_ STATE/PROVINCE: \_\_\_\_\_

POSTAL/ZIP CODE: \_\_\_\_\_ PHONE: \_\_\_\_\_ FAX: \_\_\_\_\_

E-MAIL ADDRESS: \_\_\_\_\_

SHIP-TO ADDRESS: (IF DIFFERENT FROM ABOVE) \_\_\_\_\_

ATTN: (NAME) \_\_\_\_\_ ADDRESS: \_\_\_\_\_

CITY: \_\_\_\_\_ STATE/PROVINCE: \_\_\_\_\_

POSTAL/ZIP CODE: \_\_\_\_\_

P.O. NUMBER: \_\_\_\_\_ QUANTITY ORDERED: \_\_\_\_\_

SERIAL NUMBER OF DOOR YOU ARE REPLACING (IF AVAILABLE): \_\_\_\_\_

*(This is located on a metal tag inside the door on the driver's side, next to the top panel.)*

MAKE & YEAR OF TRAILER OR TRUCK BODY: \_\_\_\_\_

**DOOR TYPE:**

- 3/4" Dryfreight Wood
- 3/4" Aluminum Skin
- 1" Dryfreight Wood
- 1" Aluminum Skin
- 1-1/8" PolarGuard®
- 2-1/2" PolarGuard®
- FleetStar®
- CityCargo™
- WeatherTite™
- Shutter Door

**LOCK TYPE:**

- Maximum Security Lock (Standard)
- Single-Point Slam Lock (Locks into sill)
- Two-Point Slam Lock  
(Locks into vertical track)
- LifeGuard Lock (PolarGuard)

**RUBBER HEAD SEAL:**

- Mounted on Header on Body
- Mounted on Top Panel
- Mounted on Both

**OPTIONS:**

- Standard Rubber Side Seals
- Precision Rollers
- Stainless Steel Rivets
- Heavy-Duty Bottom Fixture
- Brush Side Seals
- Brush Header Seals
  - Header Mounted
  - Top Panel Mounted
  - Both

**HINGES:**

- Standard
- High-Strength
- Stainless Steel
- E-Coated
- Yellow Chromate

**DOOR FINISH:**

- Prime Only
- Top Coat –  
Color: \_\_\_\_\_

**DOOR IS:**

- Complete (with tracks and counterbalance)
- Drop-In (without tracks and counterbalance)
- With Tracks Only
- With Counterbalance Only
- Other: \_\_\_\_\_

**• Doors are custom built and CANNOT be returned.**




# OVERHEAD DOOR ORDER FORM

## PART 2

Please fill in the dimensions (in inches) for all blank squares ( 1 through 11) on the diagrams on this page.

All doors are made for net opening width, NOT wall-to-wall dimensions.

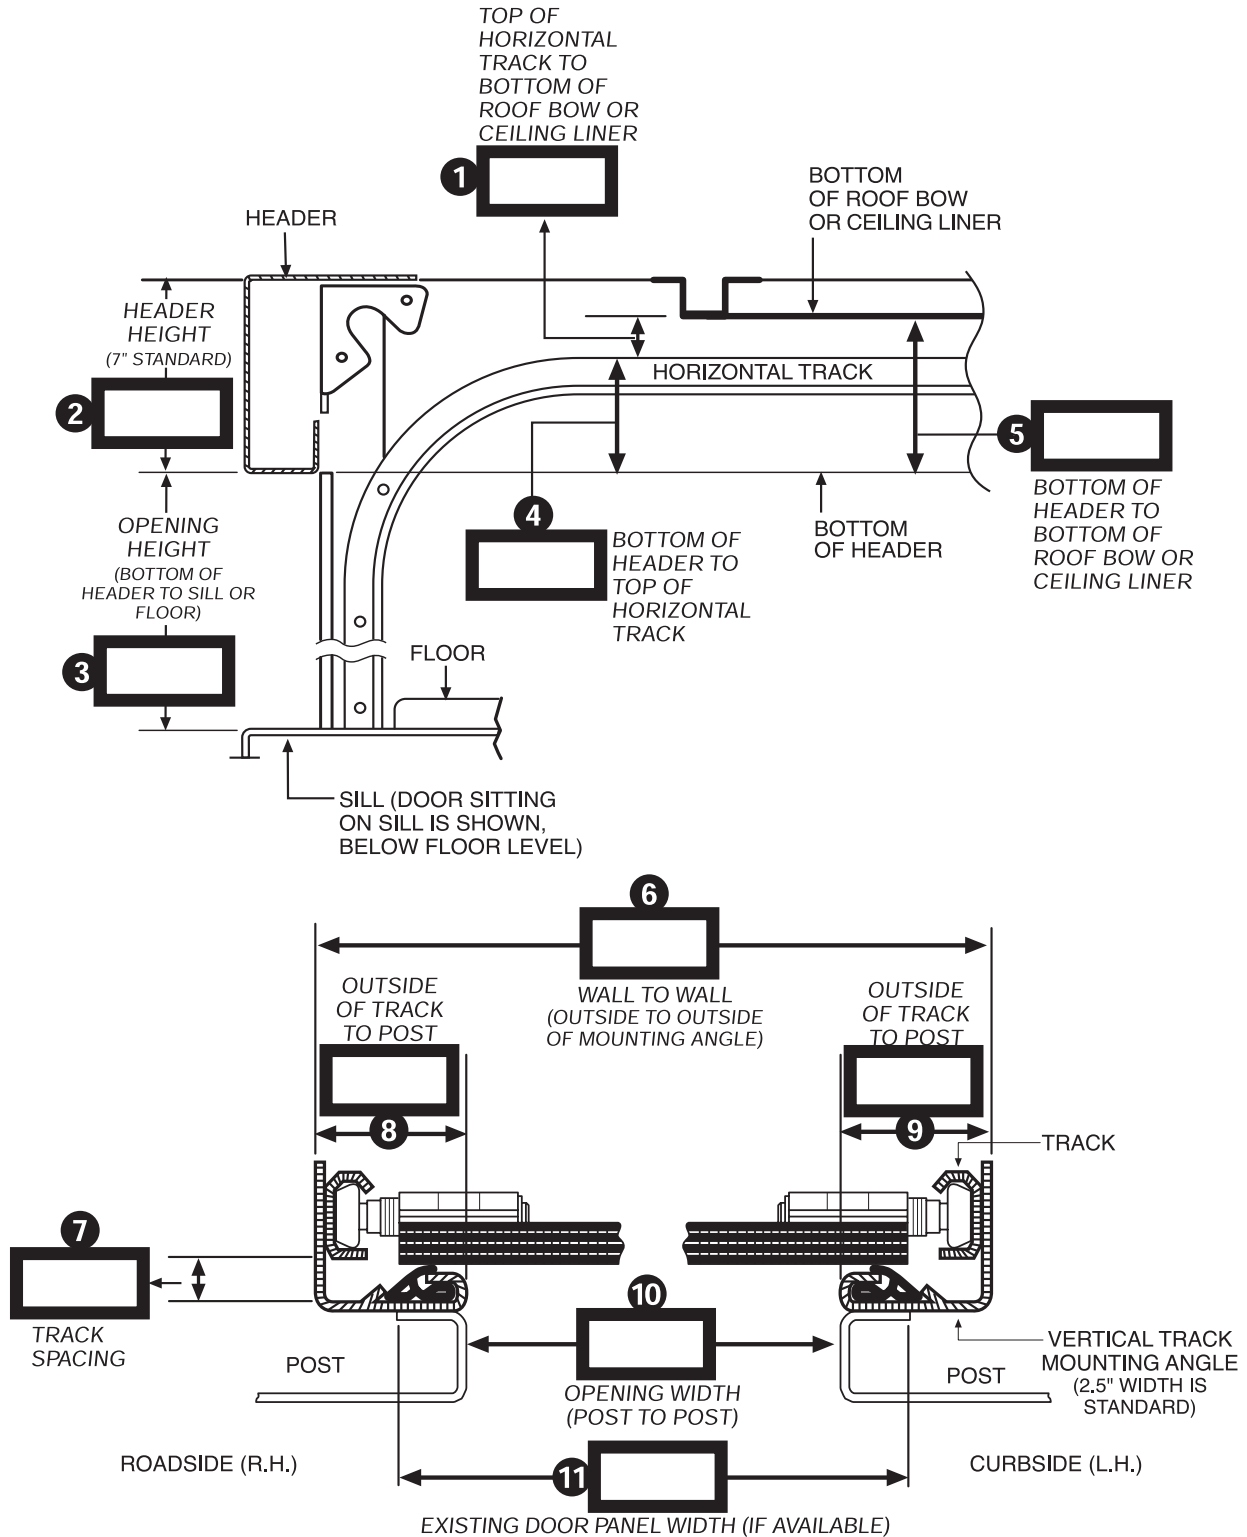

When complete, please fax both parts of this form to TODCO at 1-800-248-6326.