

# WEATHERTITE™



TODCO®



# INTRODUCING THE WEATHERTITE™ DOOR

## DESIGNED TO BE THE ULTIMATE IN LONGEVITY AND VALUE.

If you're looking for new ideas to get more long-running value out of your trucks and trailers, take a close look at TODCO's innovative new WeatherTite™ overhead door. It's a tough and attractive new choice, crafted from a polycomposite material that'll let you shed any worries about the greatest threat to door durability and life: water penetration. The WeatherTite door is impervious to moisture, so it eliminates the problems of swelling, warping, finish delamination and rotting. Plus, it's rugged enough to stand up to the day-in-and-day-out challenges every fleet faces. Get all the facts about this latest TODCO innovation. Then bring on the rainiest days. Now with the WeatherTite door, it's great weather for TODCO.

**WEATHERTITE DOORS DROP INTO ALL EXISTING 3/4" TRACK CONFIGURATIONS.**



1332 Fairground Road East  
Marion, Ohio 43302  
(740) 383-6376

**NOT JUST TOUGH...TODCO-TOUGH.**

[www.todco.com](http://www.todco.com)


**Single counterbalance spring** for effortless operation.

**Tough double-wall panels** are extruded in one piece for added strength.

**Unique joint configuration**

forces water flow downward, while keeping door panels properly aligned and rigid.

**Horizontal reinforcement ribs** add to the strength.

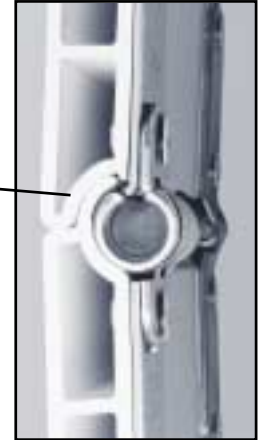

**Panel configuration** accepts TODCO standard hardware.

**No thru rivets at panel joints.** Gives the door a smooth surface for an automotive quality paint finish and/or excellent decal adhesion.

**Unique panel joints** designed to form a better water barrier. Also designed for maximum pinch protection.

**Polycomposite construction** makes the door impervious to moisture. Smooth, high quality finish makes painting optional.

**Aircraft quality** 7 x 19 stainless steel cables.



**Adjustable top fixtures** plus rubber head seal provide tight seal at top of door.

**Three rows of center hinges** standard on panels 73" or wider.

**Strong four-knuckle end hinges.**



**Side seals standard.**

**Standard bottom seal** for weather protection.

For new orders and order inquiries, fax 1-800-24-TODCO (1-800-248-6326).  
TODCO reserves the right to change product specifications at any time without notice.