

WEATHERTITE™



TODCO®



INTRODUCING THE WEATHERTITE™ DOOR

DESIGNED TO BE THE ULTIMATE IN LONGEVITY AND VALUE.

If you're looking for new ideas to get more long-running value out of your trucks and trailers, take a close look at TODCO's innovative new WeatherTite™ overhead door. It's a tough and attractive new choice, crafted from a polycomposite material that'll let you shed any worries about the greatest threat to door durability and life: water penetration. The WeatherTite door is impervious to moisture, so it eliminates the problems of swelling, warping, finish delamination and rotting. Plus, it's rugged enough to stand up to the day-in-and-day-out challenges every fleet faces. Get all the facts about this latest TODCO innovation. Then bring on the rainiest days. Now with the WeatherTite door, it's great weather for TODCO.

WEATHERTITE™ PANEL 10-YEAR LIMITED WARRANTY.

TODCO warrants to the original end-user purchaser of the WeatherTite door that the door panels will be free from defects in material and workmanship for a period of ten (10) years from the date of delivery, subject to all terms, conditions and limitations.

To view details of the WeatherTite warranty, go to www.todco.com.



1332 Fairground Road East
Marion, Ohio 43302
(740) 383-6376

NOT JUST TOUGH...TODCO-TOUGH.
www.todco.com

Single counterbalance spring for effortless operation.


Tough double-wall panels are extruded in one piece for added strength.



Adjustable top fixtures plus rubber head seal provide tight seal at top of door.

Three rows of center hinges standard on panels 73" or wider.

No thru rivets on center hinges. Gives the door a smooth surface for an automotive quality paint finish and/or excellent decal adhesion.

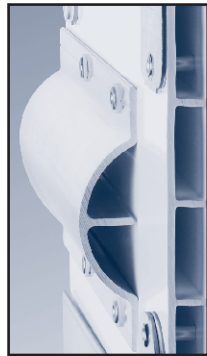


Aluminum reinforcement straps required for door openings in excess of 87" wide.

Standard bottom seal for weather protection.

Unique joint configuration

forces water flow downward, while keeping door panels properly aligned and rigid.

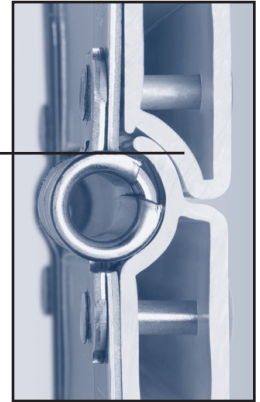


Horizontal reinforcement ribs add to the strength.

Panel configuration accepts TODCO standard hardware.

Polycomposite construction makes the door impervious to moisture. Smooth, high quality finish makes painting optional.

Strong four-knuckle end hinges.

Unique panel joints designed to form a better water barrier. Also designed for maximum pinch protection.

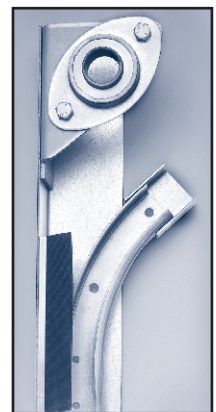

Side seals standard.

WEATHERTITE DOORS DROP INTO ALL EXISTING 3/4" TRACK CONFIGURATIONS.

For new orders and order inquiries, fax 1-800-24-TODCO (1-800-248-6326). TODCO reserves the right to change product specifications at any time without notice.